- **Model：HXLBQ-DTA67**
- **Product Name：Cavity Band Pass Filter**
- **Frequency：7246~7249MHz**

★High Stop Band Rejection
★Low Pass Band Insertion Loss
★Customizable Design
★High Reliability

| Technical Data Sheet | |
|---|---|
| **Item** | **Parameters** |
| • Center Frequency (F0) | 7247.5MHz |
| • Pass Band Frequency | 7246～7249MHz |
| • Pass Band Insertion Loss | ≤1.0dB |
| • Pass Band VSWR | ≤1.3:1 |
| • Stop Band Attenuation | ≥35dB @ 8025～8055MHz |
| • Impedance | 50 ohms |
| • Power Handling | ≤5W |
| • Connectors | SMA-Female |
| • Operating Temperature | -30℃～+70℃ |
| • Surface Finish | Black Paint |
| • Net Weight | TBD |
| • Configuration | As Below (Size Unit: mm) |

Note：The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.

**Outline Drawing:** (Dimensions Unit: mm, Dimensions Tolerance: ±0.5mm)

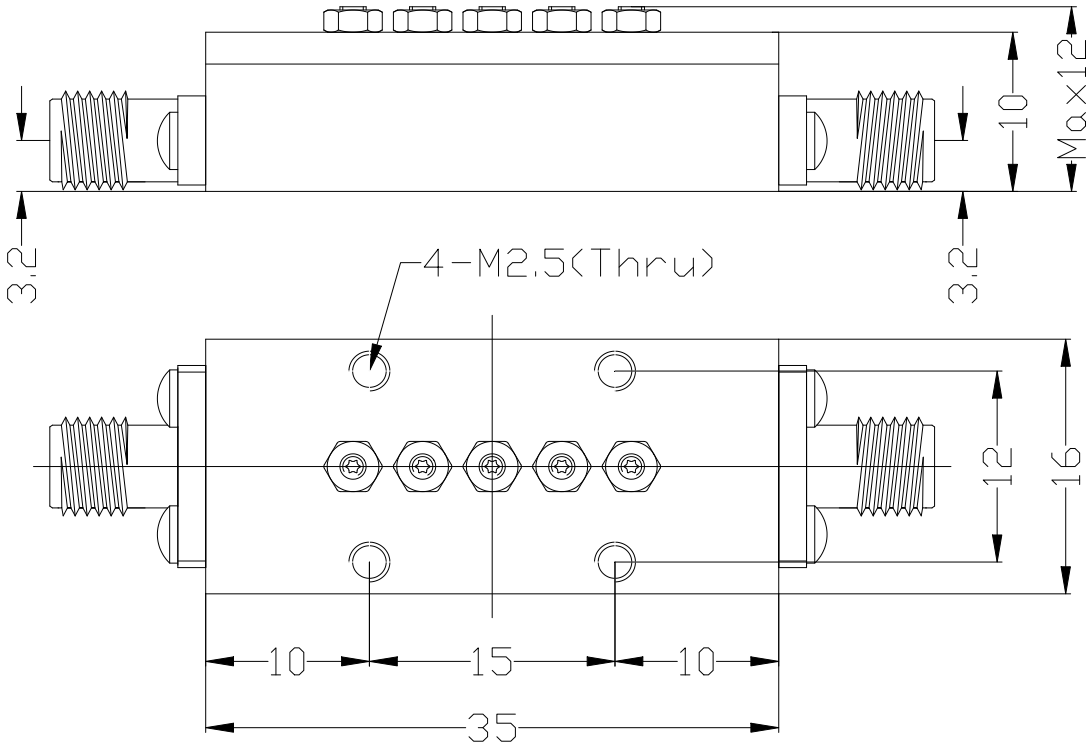



Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China