


# HXLBQ-DTA645

## Cavity Band Pass Filter

### Technical Data Sheet

S/N	Item	Parameters
1	Center Frequency(F0)	1950MHz
2	Pass Band Frequency	1700 ~ 2200MHz **
3	Pass Band Insertion Loss	≤0.8dB
4	Pass Band Ripple	≤0.4dB
5	Pass Band Return Loss	≥20dB
6	Stop Band Rejection	≥70dB @ DC ~ 1200MHz      ≥70dB @ 2500 ~ 6800MHz
7	Impedance	50 Ohms
8	Power Handling	20W Max.
9	Connectors	SMA-Female
10	Surface Finish	Painted Black
11	Temperature Range	-30°C ~ +70°C
12	Material	Housing: 6061 Aluminum alloy      Resonant column: H59 Copper alloy Cover: LY12 Aluminum alloy      Connectors: Stainless Steel Tuning screw: H62 Copper alloy      Other screw: Stainless Steel
13	Dimensions	110*26*23mm
14	Net weight	TBD

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

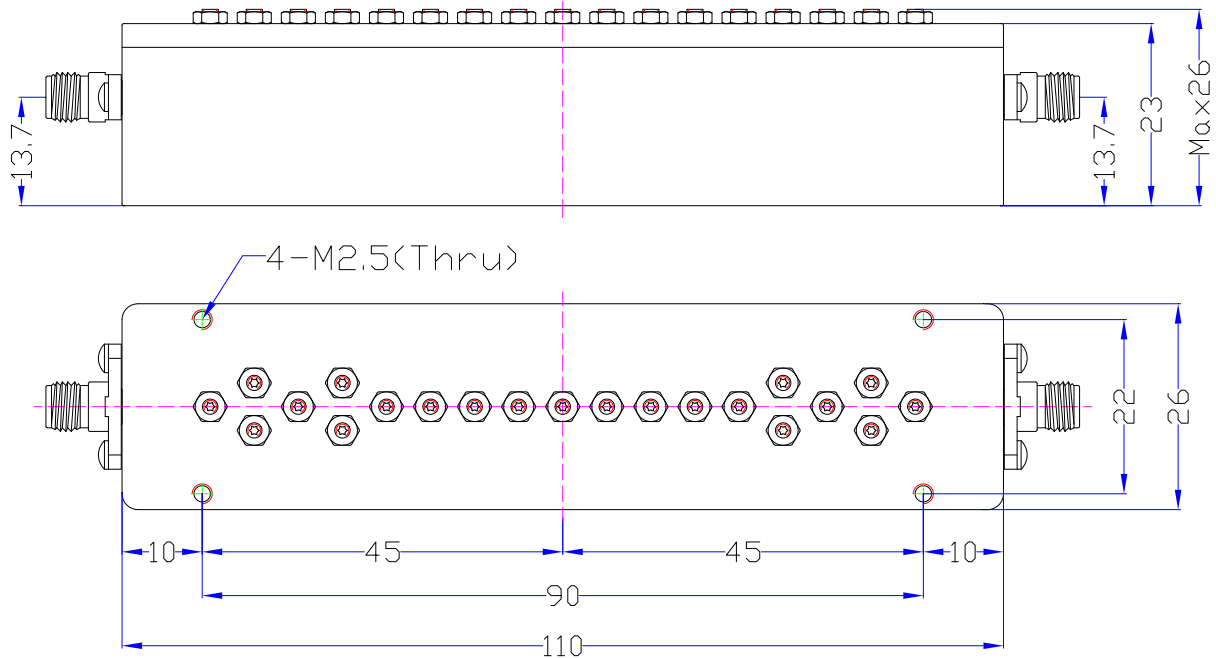

\*\* The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.