


HXLBQ-DTA674

Cavity Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters	
1	Center Frequency(F0)	1317.5MHz	
2	Pass Band Frequency	1250 ~ 1385MHz **	
3	Pass Band Insertion Loss	≤1.5dB	
4	Pass Band Ripple	≤0.58dB	
5	Pass Band Return Loss	≥23dB	
6	Stop Band Rejection	≥80dB @ DC ~ 1160MHz ≥40dB @ 1160 ~ 1210MHz	≥40dB @ 1425 ~ 1460MHz ≥80dB @ 1460 ~ 6000MHz
7	Impedance	50 Ohms	
8	Power Handling	10W Max.	
9	Connectors	SMA-Female	
10	Surface Finish	Painted Black	
11	Temperature Range	-30℃ ~ +70℃	
12	Material	Housing: 6061 Aluminum alloy Cover: LY12 Aluminum alloy Tuning screw: H62 Copper alloy	Resonant column: H59 Copper alloy Connectors: Stainless Steel Other screw: Stainless Steel
13	Dimensions	140*25*28mm	
14	Net weight	TBD	

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.4mm)

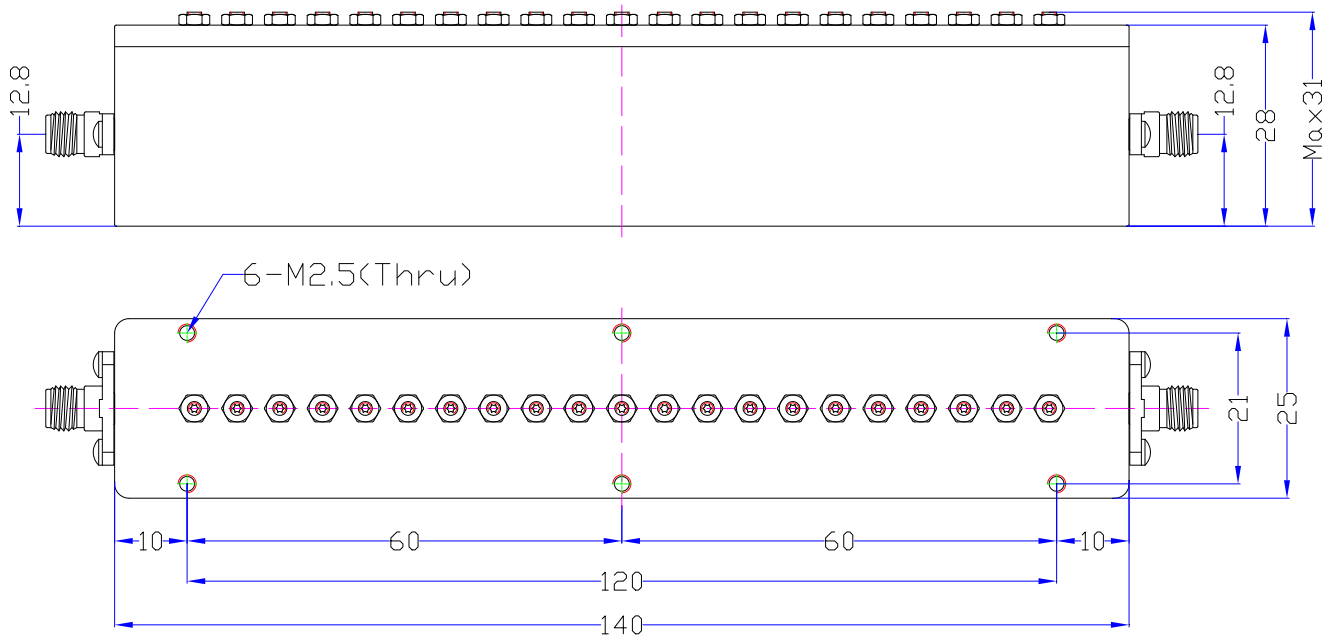

** The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.