


HXLBQ-DTA805

Cavity Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters	
1	Center Frequency(F0)	930MHz	
2	Pass Band Frequency	927.5 ~ 932.5MHz **	
3	Pass Band Insertion Loss	≤2.5dB	
4	Pass Band Ripple	≤0.7dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥40dB @ DC ~ 920.5MHz	≥40dB @ 939.5 ~ 3000MHz
7	Impedance	50 Ohms	
8	Power Handling	20W Max.	
9	Connectors	SMA-Male / SMA-Female	
10	Surface Finish	Painted Black	
11	Temperature Range	-20℃ ~ +60℃	
12	Material	Housing: 6061 Aluminum alloy Cover: LY12 Aluminum alloy Tuning screw: H62 Copper alloy	Resonant column: H59 Copper alloy Connectors: Stainless Steel Other screw: Stainless Steel
13	Dimensions	95*65*41mm	
14	Net weight	0.378 KG	

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.5mm)

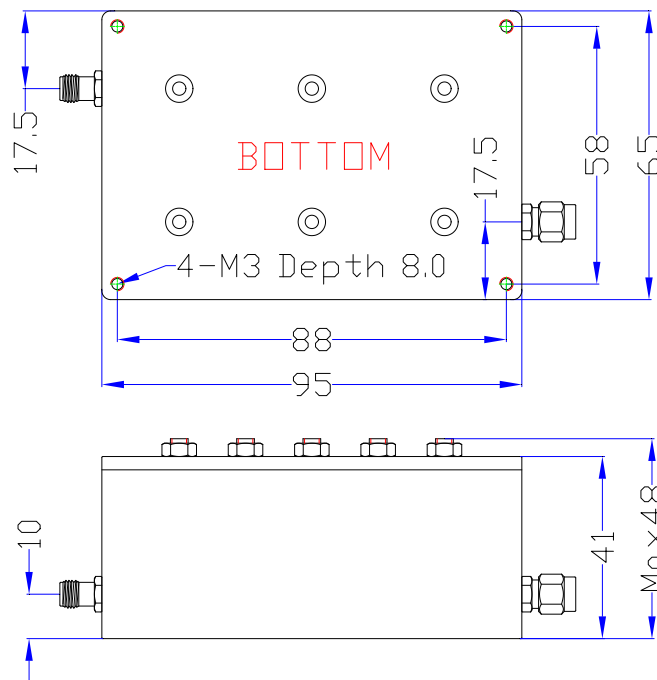

** The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.