


# HXLBQ-DTA798

## Cavity Band Pass Filter

### Technical Data Sheet

S/N	Item	Parameters	
1	Center Frequency(F0)	18000MHz	
2	Pass Band Frequency	17000 ~ 19000MHz **	
3	Pass Band Insertion Loss	≤1.4dB	
4	Pass Band Ripple	≤0.5dB	
5	Pass Band Return Loss	≥23dB	
6	Stop Band Rejection	≥80dB @ DC ~ 16450MHz ≥50dB @ 16450 ~ 16600MHz	≥50dB @ 19400 ~ 19550MHz ≥80dB @ 19550 ~ 33000MHz
7	Impedance	50 Ohms	
8	Power Handling	5.0W Max.	
9	Connectors	SMA-Female	
10	Surface Finish	Painted Black	
11	Temperature Range	-30℃ ~ +70℃	
12	Material	Housing: H62 Copper alloy Cover: H62 Copper alloy Tuning screw: H62 Copper alloy	Connectors: Stainless Steel Other screw: Stainless Steel
13	Dimensions	100*16*9.5mm	
14	Net weight	0.105 KG	

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

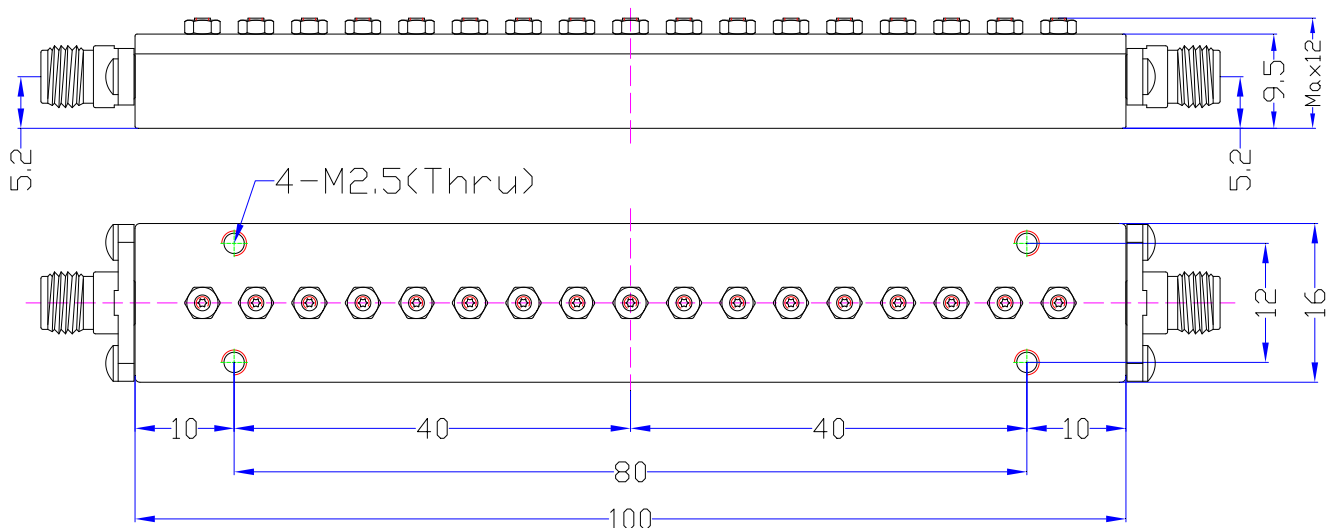

**\*\* The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.**