


HXLBQ-DTA1013

Comb Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters	
1	Center Frequency(F0)	5300MHz	
2	Pass Band Frequency	4800 ~ 5800MHz **	
3	Pass Band Insertion Loss	≤0.8dB	
4	Pass Band Ripple	≤0.4dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥80dB @ DC ~ 4150MHz ≥60dB @ 4150 ~ 4300MHz	≥80dB @ 6300 ~ 15000MHz
7	Impedance	50 Ohms	
8	Power Handling	5.0W Max.	
9	Connectors	SMA-Female	
10	Surface Finish	Painted Black	
11	Temperature Range	-30°C ~ +70°C	
12	Material	Housing: H62 Copper alloy Cover: H62 Copper alloy Tuning screw: H62 Copper alloy	Connectors: Stainless Steel Other screw: Stainless Steel
13	Dimensions	100*17*13mm	
14	Net weight	0.135 KG	

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

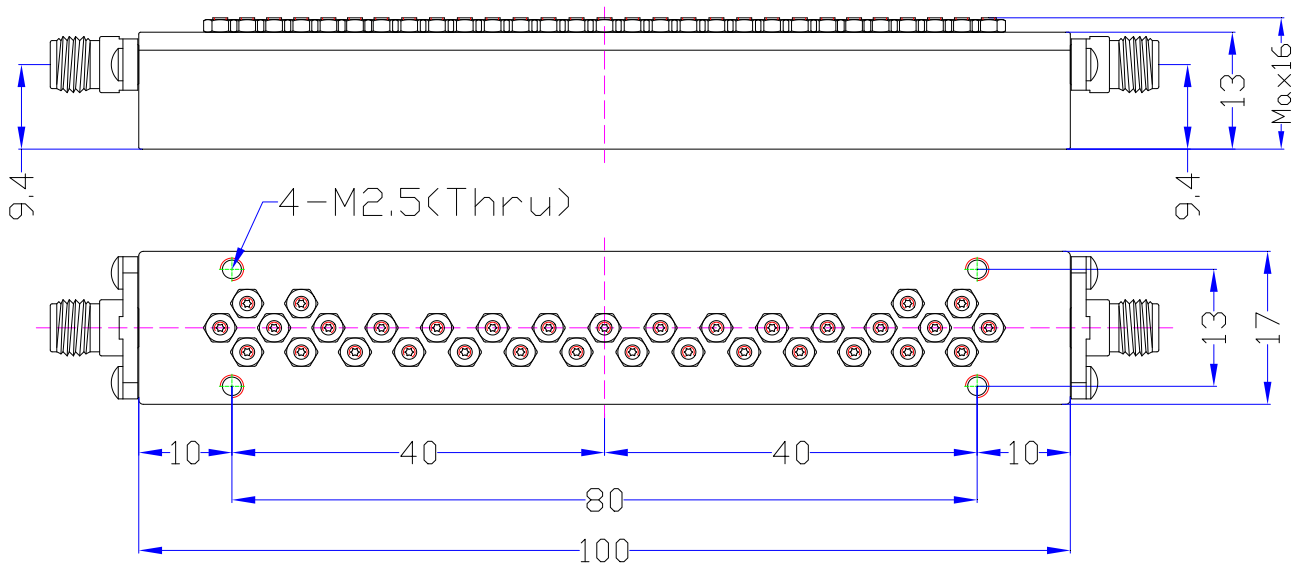

** The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.