


HXLBQ-DTA1090

Cavity Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters	
1	Center Frequency(F0)	7238.3MHz	
2	Pass Band Frequency	7228.3 ~ 7248.3MHz **	
3	Pass Band Insertion Loss	≤0.7dB	
4	Pass Band Ripple	≤0.05dB	
5	Pass Band Return Loss	≥23dB	
6	Stop Band Rejection	≥80dB @ DC ~ 5378MHz ≥50dB @ 5378 ~ 6478MHz	≥50dB @ 7998 ~ 9098MHz ≥80dB @ 9098 ~ 27000MHz
7	Impedance	50 Ohms	
8	Power Handling	5.0W Max.	
9	Connectors	SMA-Male / SMA-Female	
10	Surface Finish	Painted Black	
11	Temperature Range	-30°C ~ +70°C	
12	Material	Housing: H62 Copper alloy Cover: H62 Copper alloy Tuning screw: H62 Copper alloy	Connectors: Stainless Steel Other screw: Stainless Steel
13	Dimensions	40*16*8mm	
14	Net weight	TBD	

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

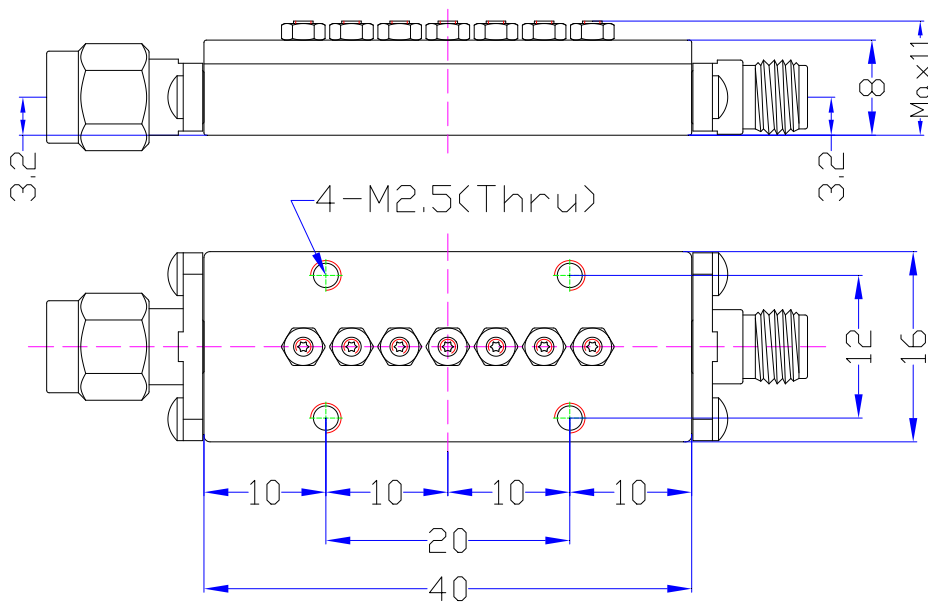

** The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.