●**Product Name：High Pass Filter**
●**Model：HXLBQ-GTA69**
●**Frequency：9.0~23GHz**

★High Stop Band Rejection
★Low Pass Band Insertion Loss
★Customizable Design
★Small Size

Technical Data Sheet		
Item	**Parameters**	
● Cut Off Frequency	9.0GHz	
● Pass Band Frequency	9.0 ~ 23GHz	
● Pass Band Insertion Loss	≤2.0dB @ 9.0 ~ 9.5GHz ≤1.0dB @ 9.5 ~ 23GHz	
● Pass Band VSWR	≤1.5:1	
● Stop Band Attenuation	≥60dB @ DC ~ 8.22GHz	
● Impedance	50 Ohms	
● Power Handling	15W Max.	
● Connectors	SMA-Female	
● Surface Finish	Guide Oxygen or Painted Black	
● Temperature Range	-55℃ ~ +85℃	
● Material	Housing: 6061 Aluminum alloy Connectors: Stainless Steel	screw: Stainless Steel
● Dimensions	29*23*10mm	
● Net weight	0.025 KG	

●**Outline Drawing:** (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

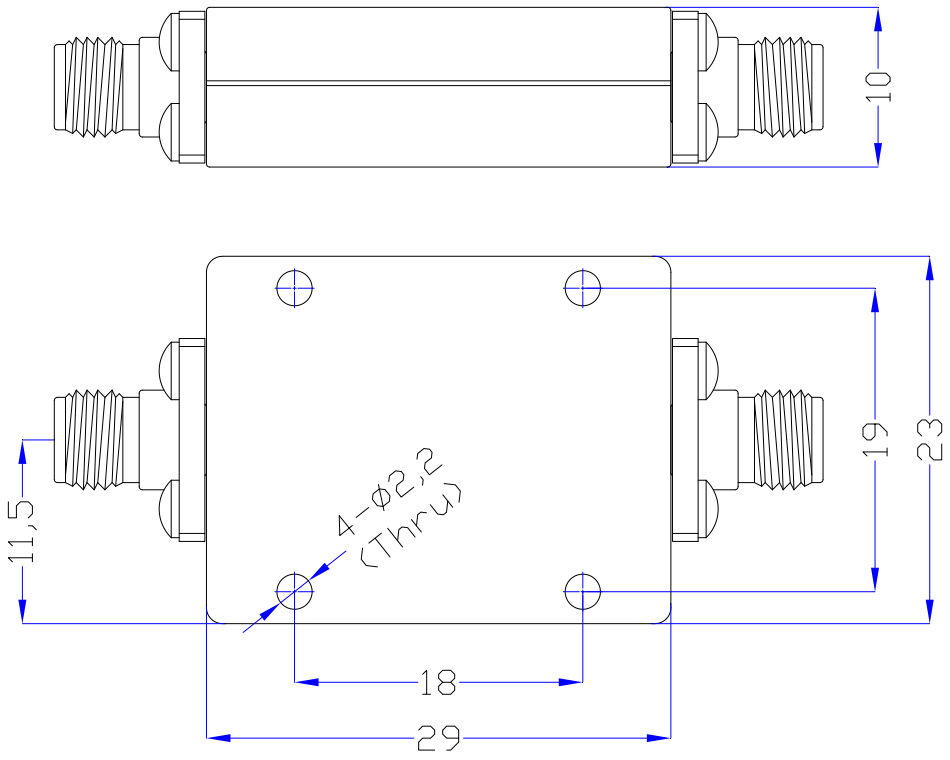

Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China