- **Product Name：LC Band Rejection Filter**
- **Model：HXLBQ-DZA192LC**
- **Frequency：36~38MHz**

★High Stop Band Rejection
★Low Pass Band Insertion Loss
★Customizable Design
★High Reliability

Technical Data Sheet	
Item	**Parameters**
● Stop Band Center Frequency	37MHz
● Stop Band Frequency	36 ~ 38MHz
● Stop Band Attenuation	≥60dB
● Pass Band Frequency	DC ~ 30MHz , 45 ~ 150MHz
● Pass Band Insertion Loss	≤2.0dB
● Pass Band VSWR	≤1.8:1
● Impedance	50 Ohms
● Power Handling	+15dBm Max.
● Connectors	SMA-Female
● Surface Finish	Painted Black
● Temperature Range	-30℃ ~ +70℃
● Dimensions	30*18*13mm
● Net weight	0.02KG

●Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.4mm)

◆Material	●Housing: 6061 Aluminum alloy	●Connectors: Stainless Steel
	●Cover: LY12 Aluminum alloy	●Other screw: Stainless Steel

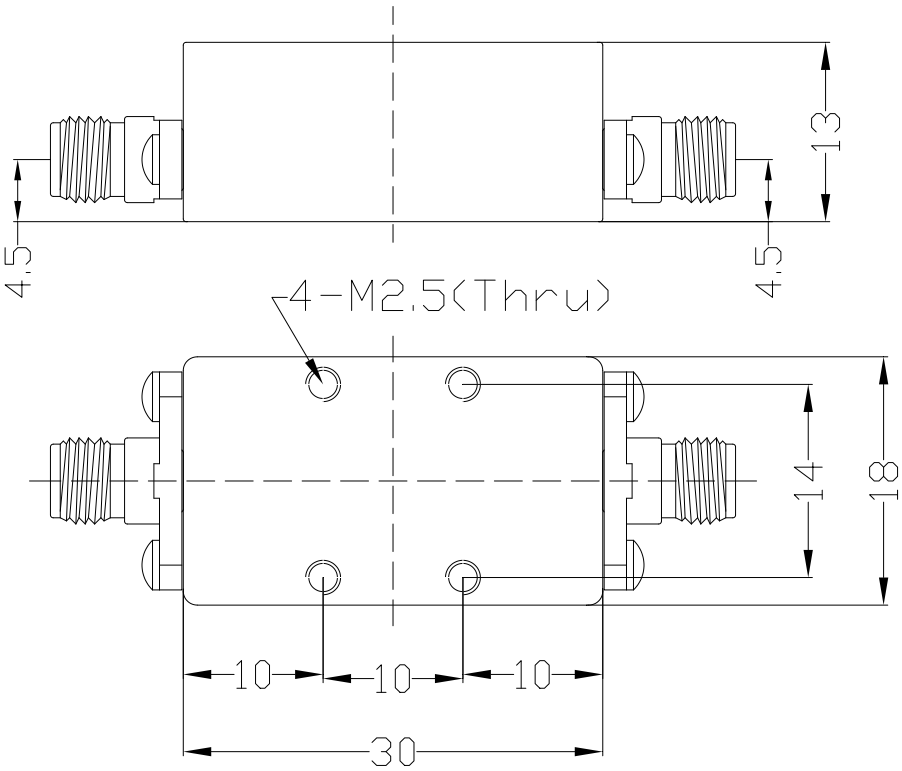

Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China