- **Product Name：LC Band Rejection Filter**
- **Model：HXLBQ-DZA196LC**
- **Frequency：617~698MHz**

★High Stop Band Rejection
★Low Pass Band Insertion Loss
★Customizable Design
★High Reliability

Technical Data Sheet

Item	Parameters
Stop Band Frequency	617 ~ 698MHz
Stop Band Attenuation	≥50dB
Pass Band Frequency	DC ~ 540MHz , 780 ~ 1500MHz
Pass Band Insertion Loss	≤2.5dB
Pass Band VSWR	≤1.8:1
Impedance	50 Ohms
Power Handling	1.0W Max.
Connectors	SMA-Female
Surface Finish	Painted Black
Temperature Range	-30℃ ~ +70℃
Net weight	0.02KG

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.4mm)

◆Material
- Housing: 6061 Aluminum alloy
- Cover: LY12 Aluminum alloy
- Connectors: H59 Copper, Plated ternary alloy
- Dimensions:30*18*13mm

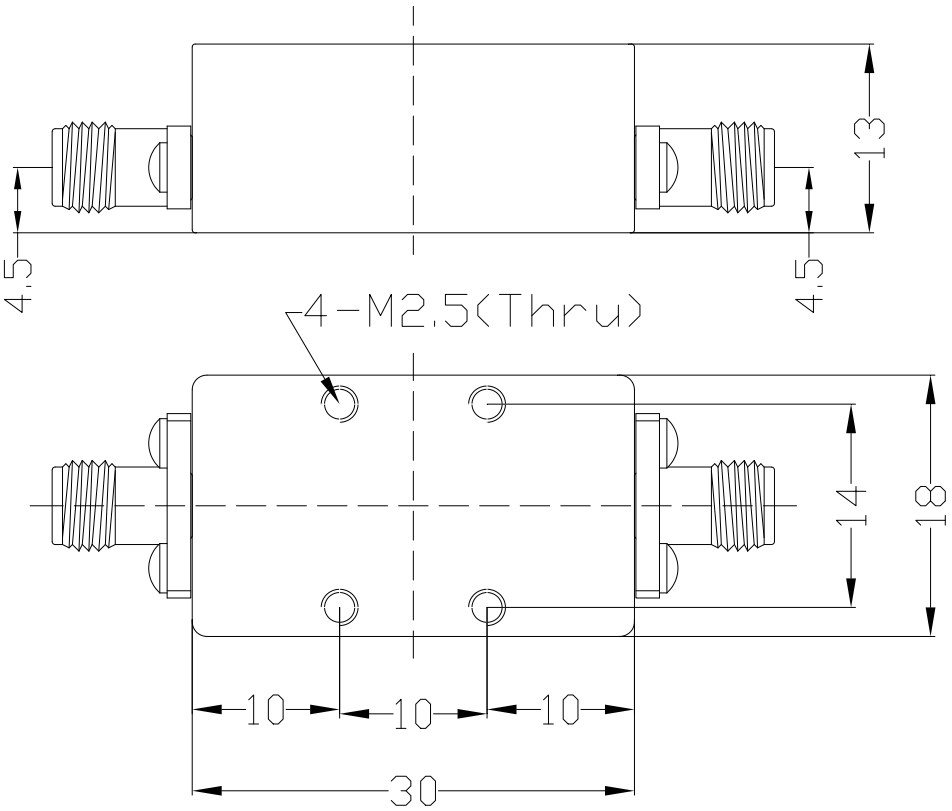

Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China