- **Model：HXGF-G2A01-N**
- **Product Name：2 Way Power Divider**
- **Frequency：0.8~3.6GHz**

★Ultra Wide Frequency
★Small Size
★Customizable Design
★High Reliability

## Technical Data Sheet

| Item | Parameters |
|---|---|
| Way | 2 |
| Frequency Range | 0.8～3.6GHz |
| Insertion Loss | ≤0.8dB (Does not contain theory loss 3 dB) |
| VSWR | ≤1.4:1 |
| Isolation | ≥20dB |
| Amplitude Balance | ≤±0.3dB |
| Phase Balance | ≤±3° |
| Power Handling | Forward ≤10Watt |
| Impedance | 50 ohms |
| Surface Finish | Gush Arenaceous Guide Oxygen (Silvery White) |
| Connectors | N-Female |
| Temperature Range | -40℃～+70℃ |
| Net Weight | TBD |

**Outline Drawing:** (Dimensions Unit: mm, Dimensions Tolerance: ±0.5mm)

| | | |
|---|---|---|
| ◆Material | ●Housing: 6061 Aluminum alloy | ●Connectors: H59 Copper, Plated ternary alloy |
| | ●Cover: LY12 Aluminum alloy | ●Other screw: Stainless Steel |

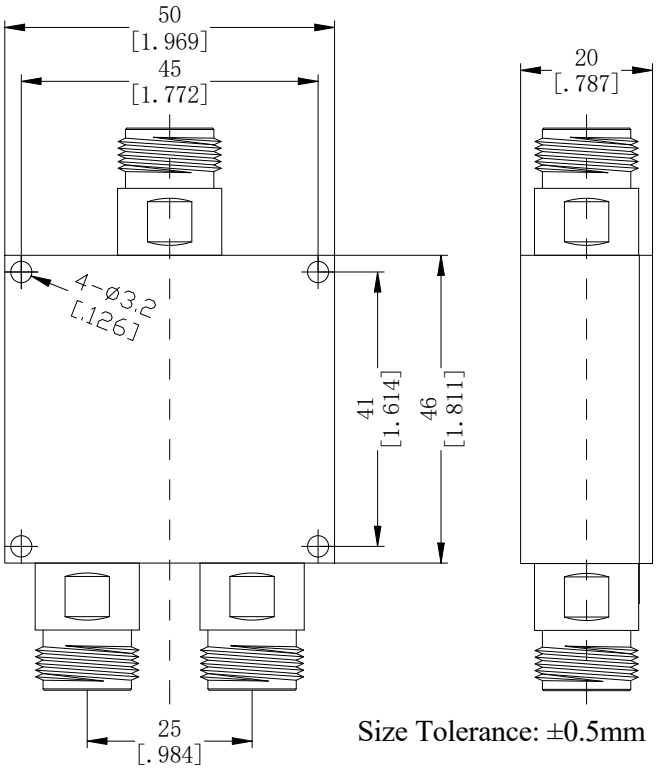


Size Tolerance: ±0.5mm


Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China