●**Product Name：LC Band Rejection Filter**
●**Model：HXLBQ-DZA256LC**
●**Frequency：135~175MHz**

★High Stop Band Rejection
★Low Pass Band Insertion Loss
★Customizable Design
★High Reliability

Technical Data Sheet	
Item	**Parameters**
● Stop Band Frequency	135 ~ 175MHz
● Stop Band Attenuation	≥40dB
● Pass Band Frequency	DC ~ 110MHz , 210 ~ 1200MHz
● Pass Band Insertion Loss	≤2.0dB
● Pass Band VSWR	≤1.8:1
● Impedance	50 Ohms
● Power Handling	1.0W Max.
● Connectors	SMA-Female
● Surface Finish	Painted Black
● Temperature Range	-30℃ ~ +70℃
● Net weight	0.02 KG

●**Outline Drawing:** (Dimensions Unit: mm, Dimensions Tolerance: ±0.4mm)

◆Material
●Housing: 6061 Aluminum alloy
●Cover: LY12 Aluminum alloy
●Connectors: Stainless Steel
●Dimensions:30*18*13mm

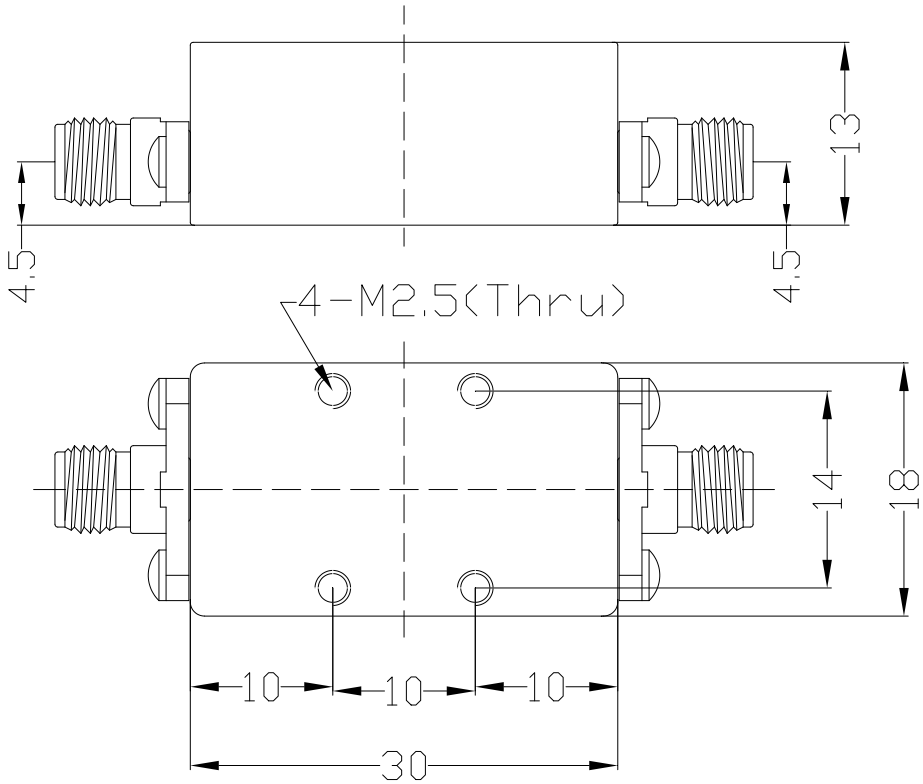

Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China